

# TECHNICAL DATA SHEET


Lenix

Document No: TDS.1084

Revision No: 00

## 1084 Corner Bead

|                           |                                             |
|---------------------------|---------------------------------------------|
| ■ Product Range           | Drylining Profiles                          |
| ■ Application             | Dry Lining                                  |
| ■ Product Type            | Corner Bead                                 |
| ■ Plaster Thickness       | 3-4 mm                                      |
| ■ Material                | Aluzinc Sheet Steel<br>DX51D+AZ to EN 10142 |
| ■ Coating / Finish Colour | 150 g /m2 Aluzinc Coating                   |
| ■ Material Thickness      | 0,40 mm                                     |
| ■ Wings / Length          | 30x30 mm                                    |
| ■ Standards               | EN 14353                                    |
| ■ Reaction to Fire        | Class A1                                    |
| ■ DOP Reference           | DOP.1084                                    |
| ■ Length Options          | 280, 300 cm                                 |
| ■ Art Nr.                 | 07.01.04.1084.2<br>07.01.04.1084.3          |
| ■ Packaging               | 50 pcs/bun                                  |

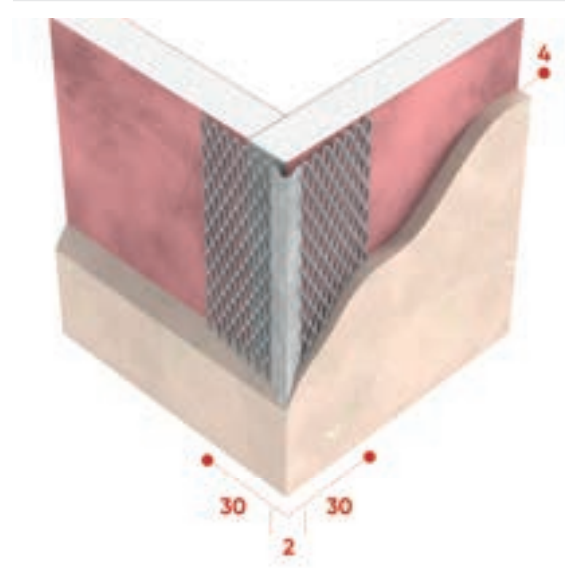

### Remarks:

This technical data sheets replaces all previous versions. Işık reserves the right to modify products without prior notice. Please rely on the application assembly and storage guidelines.